


D-SUB I.D.C. TYPE

Specifications:


Contact Resistance: 30mΩmax.at DC 100mA
Insulator Resistance: 1000MΩmin.at DC 500V
Current Rating: 1 AMP

Dielectric Withstanding








Voltage: AC 500V For 1 minute
Operating Temperature: -55°C ~ +105°C
Contact : MALE Brass
 FEMALE Phosphor Bronze
Housing: PBT & 30% Glass Fiber (UL 94V-O)

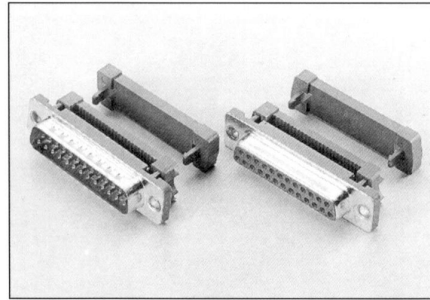

MALE

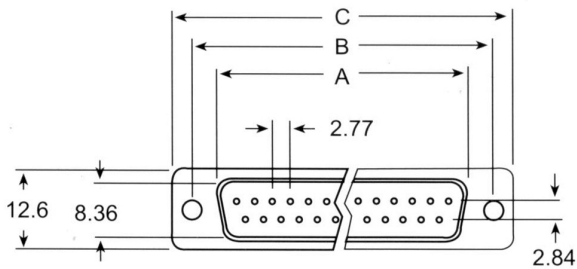

FEMALE

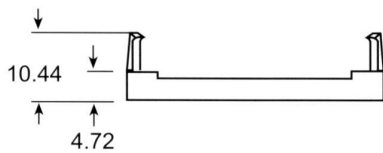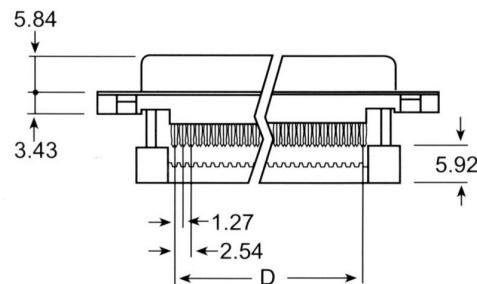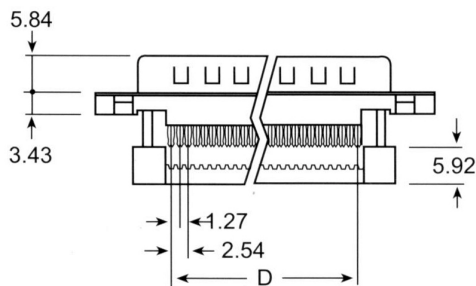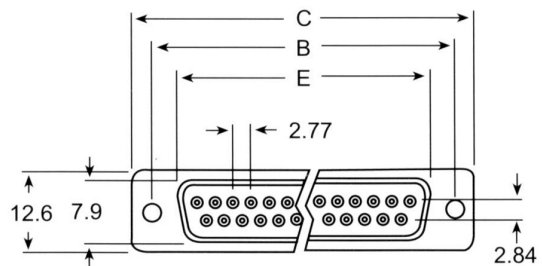

Dimension

Position	A	B	C	D	E
9	16.92	25.00	30.80	10.16	16.30
15	25.25	33.32	39.10	17.78	24.50
25	38.96	47.04	53.10	30.48	38.30
37	55.45	63.50	69.50	45.72	54.80